


Flachkontakt

Winkelkontakt

Gabelkontakt

SPECIFICATION

1. Rating: 0.5A 12VDC
2. Withstanding voltage:
AC 500V, 60Hz for 1 minute
3. Insulation resistance (initial):
100MΩ (min.) at 500V DC
4. Contact resistance (initial):
30mΩ (max.) at AC 100mA (max.) 1 KHz




PIN HOLE LAYOUT
(BOTTOM VIEW)



SCHEMATIC
(NORMAL CLOSE)

SCHEMATIC
(NORMAL OPEN)

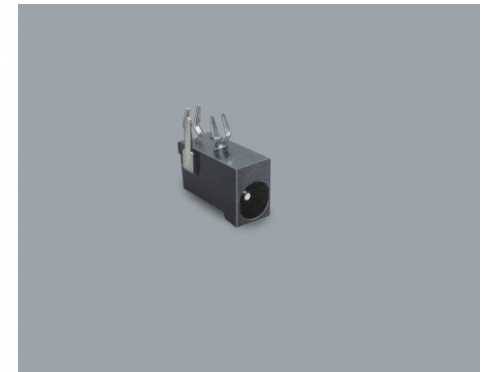

Art.Nr.	Text 1
1801010	DC-Einbaubuchse, Schalter in Ruhestellung geschlossen, Flachkontakt, Printmontage, Stift 1,3 mm
1801011	DC-Einbaubuchse, Schalter in Ruhestellung offen, Flachkontakt, Printmontage, Stift 1,3 mm
1801012	DC-Einbaubuchse, Schalter in Ruhestellung geschlossen, Winkelkontakt, Printmontage, Stift 1,3 mm
1801013	DC-Einbaubuchse, Schalter in Ruhestellung offen, Winkelkontakt, Printmontage, Stift 1,3 mm
1801014	DC-Einbaubuchse, Schalter in Ruhestellung geschlossen, Gabelkontakt, Printmontage, Stift 1,3 mm
1801015	DC-Einbaubuchse, Schalter in Ruhestellung offen, Gabelkontakt, Printmontage, Stift 1,3 mm