www.key-electronic.de

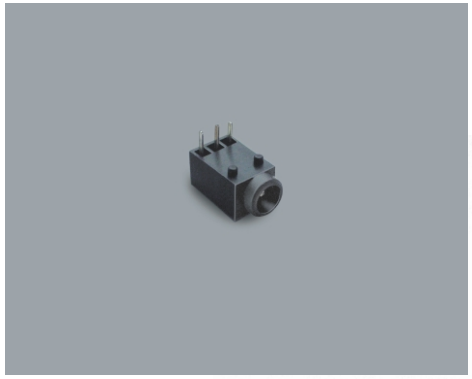

key-electronic.de
Steckverbinder und Kabel

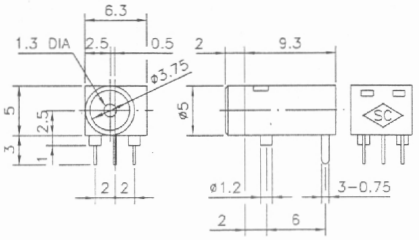


**SPECIFICATION**

1. Rating: 0.5A 12VDC
2. Withstanding voltage:
   AC 500V, 60Hz for 1 minute
3. Insulation resistance (initial):
   100MΩ (min.) at 500V DC
4. Contact resistance (initial):
   30mΩ (max.) at AC 100mA (max.) 1 KHz
5. Insertion & Extraction force:
   Initial : 0.3 to 3.0Kgs
   After life test: 0.2 to 3.0Kgs
6. Life test:
   5,000 cycles unloading (20-30 cycle/minute)

**MATERIAL**

1. Housing: Thermoplastic
2. Center pin: Nickel plating.
3. Terminal: Brass/Copper alloy
   Silver plating.




PIN HOLE LAYOUT
(BOTTOM VIEW)




SCHEMATIC
(NORMAL CLOSE)

| Art.Nr. | Text 1 |
|---|---|
| 1801023 | DC-Einbaubuchse, Schalter in Ruhestellung geschlossen und zusätzlichem Einsteckkragen, Printmontage, Stift 1,3 mm |