www.key-electronic.de

key-electronic.de
Steckverbinder und Kabel

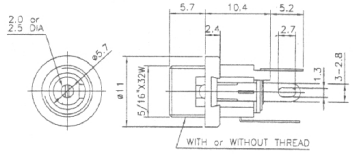

PIN HOLE LAYOUT
(BOTTOM VIEW)



SCHEMATIC
(NORMAL CLOSE)

SPECIFICATION

1. Rating: 2A 16VDC
2. Withstanding voltage:
   AC 500V, 60Hz for 1 minute
3. Insulation resistance (initial):
   100MΩ (min.) at 500V DC
4. Contact resistance (initial):
   30mΩ(max.) at AC 100mA (max.) 1 KHz
5. Insertion & Extraction force:
   Initial : 0.3 to 3.0Kgs
   After life test: 0.2 to 3.0Kgs
6. Life test:
   5,000 cycles unloading (20-30 cycle/minute)

MATERIAL

1. Housing: Thermoplastic
2. Center pin: Nickel plating.
3. Terminal: Brass/Copper alloy
   Silver plating.



Unterlegscheibe



Mutter

Art.Nr.	Text 1
1801102	DC-Einbaubuchse, Schalter in Ruhestellung geschlossen, Lötkontakte, Stift 2,0 mm
1801103	DC-Einbaubuchse, Schalter in Ruhestellung geschlossen, Lötkontakte, Stift 2,5 mm
1801104	DC-Einbaubuchse, Schalter in Ruhestellung geschlossen, Lötkontakte, mit Gewinde für Gehäuseeinbau, Stift 2,0 mm
1801105	DC-Einbaubuchse, Schalter in Ruhestellung geschlossen, Lötkontakte, mit Gewinde für Gehäuseeinbau, Stift 2,5 mm