www.key-electronic.de

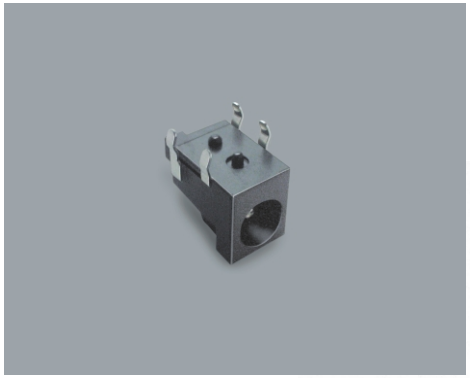

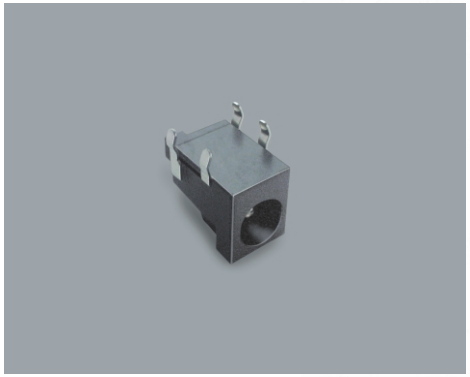

key-electronic.de

Steckverbinder und Kabel

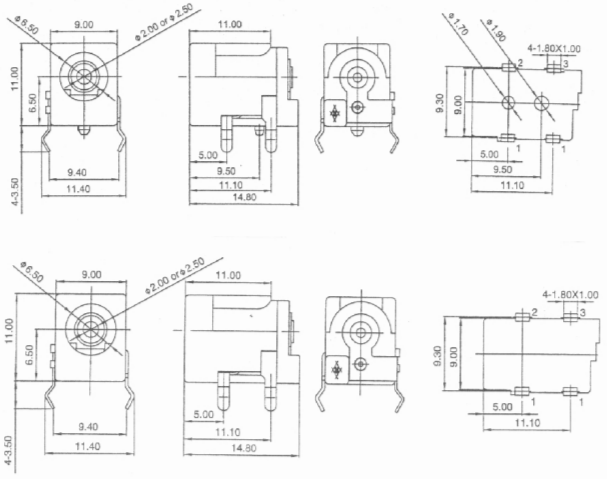

SPECIFICATION

1. Rating: 3A 12VDC
2. Withstanding voltage: AC 500V, 60Hz for 1 minute
3. Insulation resistance (initial): 100MΩ (min.) at 500V DC
4. Contact resistance (initial): 30mΩ (max.) at AC 100mA (max.) 1 KHz

MATERIAL

1. Housing: Thermoplastic
2. Center pin: Nickel plating.
3. Terminal: Brass/Copper alloy Silver plating.



SCHEMATIC (NORMAL CLOSE)

Art.Nr.	Text 1
1801145	DC-Einbaubuchse, Schalter in Ruhestellung geschlossen, mit Zentrierstift, Winkelkontakte, Stift 2,0 mm
1801146	DC-Einbaubuchse, Schalter in Ruhestellung geschlossen, ohne Zentrierstift, Winkelkontakte, Stift 2,0 mm
1801147	DC-Einbaubuchse, Schalter in Ruhestellung geschlossen, mit Zentrierstift, Winkelkontakte, Stift 2,5 mm
1801148	DC-Einbaubuchse, Schalter in Ruhestellung geschlossen, ohne Zentrierstift, Winkelkontakte, Stift 2,5 mm