




key-electronic.de


Steckverbinder und Kabel

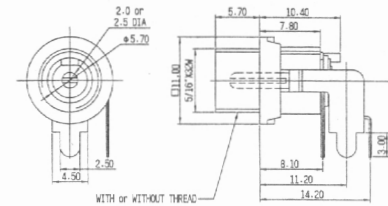


PIN HOLE LAYOUT (BOTTOM VIEW)



SCHEMATIC (NORMAL CLOSE)



Mutter



Unterlegscheibe

SPECIFICATION

1. Rating: 2A 16VDC
2. Withstanding voltage:
AC 500V, 60Hz for 1 minute
3. Insulation resistance (initial):
100MΩ (min.) at 500V DC
4. Contact resistance (initial):
30mΩ (max.) at AC 100mA (max.) 1 KHz
5. Insertion & Extraction force:
Initial : 0.3 to 3.0Kgs
After life test: 0.2 to 3.0Kgs
6. Life test:
5,000 cycles unloading (20-30 cycle/minute)

MATERIAL

1. Housing: Thermoplastic
2. Center pin: Nickel plating.
3. Terminal: Brass/Copper alloy
Silver plating.

| Art.Nr. | Text 1 |
|---------|--|
| 1801191 | DC-Einbaubuchse, Schalter in Ruhestellung geschlossen, Flachkontakte 90 ° abgewinkelt, Stift 2,0 mm |
| 1801192 | DC-Einbaubuchse, Schalter in Ruhestellung geschlossen, Flachkontakte 90 ° abgewinkelt, Stift 2,5 mm |
| 1801193 | DC-Einbaubuchse, Schalter in Ruhestellung geschlossen, Flachkontakte 90 ° abgewinkelt, mit Gewinde, Stift 2,0 mm |
| 1801194 | DC-Einbaubuchse, Schalter in Ruhestellung geschlossen, Flachkontakte 90 ° abgewinkelt, mit Gewinde, Stift 2,5 mm |